

ADVA® 181

New polymer-based superplasticiser for high strength concrete

Product Description

ADVA®181 is a high range, retarding, water-reducing, superplasticising admixture based on the latest comb polymer technology. It is specially formulated to produce high strength concrete with good slump retention. It contains no added chloride and is formulated to comply with the following chemical admixture specification for concrete: SS320-1987, ASTM C494, Type G; BS5075 Part 3, 1985.

One litre weighs approximately $1.11 \text{kg} \pm 0.02 \text{kg}$.

Dispersion

Unlike conventional superplasticisers, ADVA 181 is a superior dispersing admixture having a marked capacity to disperse the cement agglomerates normally found in a cement-water suspension. This capability results in lower dosages and better control.

Product Advantages

- Specially formulated for high strength concrete with design strengths above 60MPa.
- Provides a superior combination of long slump life with moderate time extension.
- Highly efficient, producing high slump concrete at very low dosage with no loss in strength, segregation and bleeding.
- Concrete finishes easily without stickiness, tearing or spotty set characteristics.
- It can be added with the concrete mix water for rapid batching.

Applications


ADVA 181 produces concrete with very high strength while maintaining excellent workability characteristics for high slump, pumpable concrete. It also allows concrete to be produced at very low water-cement ratios with no loss in strength.

Dispensing Equipment

Please contact your local GCP representative for further information regarding the dispensing equipment for this product.

Packaging & Storage

ADVA 181 is available in bulk and 205L drums. ADVA 181 contains no flammable ingredients. It will begin to freeze at approximately 0°C, but will return to full strength after thawing and thorough agitation. In storage and for proper dispensing, ADVA 181 should be maintained at temperatures above 0°C.

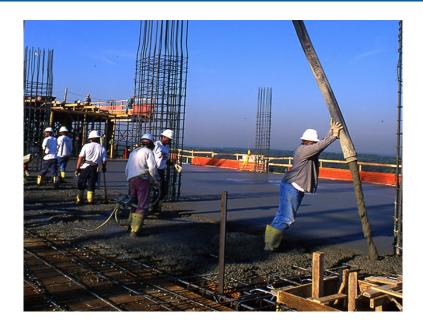

Compatibility with Other Admixtures

In concrete containing ADVA 181 the use of an air-entraining agent (such as DARAVAIR® or DAREX®AEA®) is recommended to provide suitable air void parameters for resistance against freeze-thaw attack. Due to synergistic effects between ADVA 181 and airentraining agents, the quantity of air-entraining admixture added to concrete containing ADVA 181 may be reduced. Please consult your local GCP representative for dosage quidance.

Most water reducers or water-reducing retarders are compatible with ADVA 181 Superplasticiser as long as they are separately added to the concrete. Caution should be exercised when using ADVA 181 together with a retarder, as excessive retardation can occur if the admixture dosages are too high. Pre-testing of the concrete should be performed to optimise dosages and addition sequence of these admixtures. The admixtures should not be in contact with each other before they enter the concrete.

Addition Rates

Addition rates of ADVA 181 can vary with type of application. Typically, dosage rates can range from 200 to 2,000mL / 100kg total cementitious material. However, in most superplasticiser applications, 800 to 1,200mL / 100kg of cementitious material will be sufficient. For best results ADVA 181 should be added to the mix water during the batching process. At a given water-cement ratio, the slump required for placement can be controlled by varying the addition rate. It is GCP's recommendation that trials are conducted before hand to determine the optimum dosage range to suit your application. If further assistance is required please consult your local GCP representative.

Health and Safety

See ADVA 181 Material Safety Data Sheet or consult GCP Applied Technologies.



gcpat.my | For technical information: asia.enq@gcpat.com

Australia 1800 855 525 New Zealand +64 9 448 1146 China Mainland +86 21 3158 2888 Hong Kong +852 2675 7898 India: Chennai +91 44 6624 2308 Manesar + 91 124 488 5900 Indonesia +62 21 893 4260 Japan +81 3 5226 0231 Korea +82 32 820 0800 Malaysia +60 3 9074 6133 Philippines +63 49 549 7373 Singapore +65 6265 3033 Thailand +66 2 709 4470 Vietnam +84 8 3710 6168

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

ADVA, Daravair, Darex and AEA are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies, Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2017 GCP Applied Technologies, Inc. All rights reserved.

Printed in Singapore | 02/16 | 200-ADVA-20

GCP Applied Technologies Inc., 2325 Lakeview Parkway, Alpharetta, GA 30009, USA

GCP Applied Technologies (Malaysia) Sdn. Bhd, 7 Lorong CJ 1/1A, Off Jalan Balakong, 43200 Cheras Jaya, Kuala Lumpur, Malaysia

This document is only current as of the last updated date stated below and is valid only for use in Malaysia. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.my. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2022-11-24